


MPB SERIES 1650 VETERINARY GAS FLOWMETER

GENERAL INFORMATION

The MPB Series 1650 Veterinary Gas Flowmeter consists of a polycarbonate safety cover, integral flow control valve and is suitable for trolley, or wall mounting.

FEATURES

- EASY IN-SITU TUBE REMOVAL
- THE FLOWMETER HAS A PHOTO LUMINESCENT BACKING TO PROVIDE A DEGREE OF BACK LIGHTING IN THE EVENT OF A POWER FAILURE
- ACCURACY OF MEASUREMENT IS +/- 2% FSD, OR BETTER
- PROCESS CONNECTION: 1/8" NPTF, BLACK ANODISED ALUMINIUM
- FLOW TUBE IS SUPPLIED COMPLETE WITH COLOUR BANDING TO INTERNATIONAL STANDARDS
- REMOVABLE FLOW CONTROL CARTRIDGE DESIGN TO ALLOW QUICK AND EASY SERVICING
- SAFETY COLLAR TO PREVENT SHUT OFF

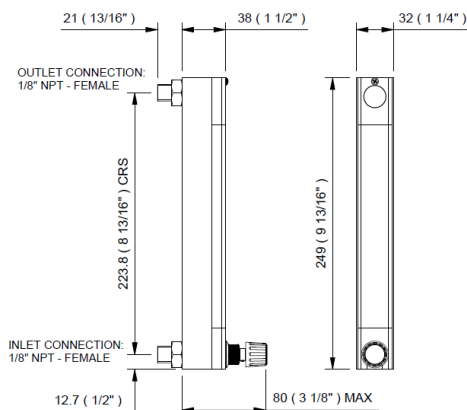

STANDARD OXYGEN FLOW RATES:

0.05-1 L/min O₂ @ 1013 mbar abs 20°C,
 0.05-2 L/min O₂ @ 1013 mbar abs 20°C,
 0.1-4 L/min O₂ @ 1013 mbar abs 20°C,
 0.1-8 L/min O₂ @ 1013 mbar abs 20°C,
 0.1-10 L/min O₂ @ 1013 mbar abs 20°C

Other gases available upon request

MPB Industries Ltd - Designers and Manufacturers of Scientific and Process Control Instrumentation

Part of the Scientific Digital Imaging plc (SDI) group of companies
 Unit 1 Branbridges Ind Est, East Peckham, Kent TN12 5HF, UK, Tel: +44 (0)1622 872401
 mail@mpbflowmeters.com, www.mpbflowmeters.com



Due to the constant development and improvement of products, information may be altered or withdrawn without notice.